# Artistic Immersion, Overwhelming Captivation

# 55VH7E-H

The impressive immersion generated by the extremely narrow 0.9 mm even-bezel becomes even more powerful with a high haze value. The 55VH7E-H delivers vivid content with no reflections, even under bright lights, allowing it to effectively captivate viewers and drive traffic to areas where it is installed.



# INTERNATIONAL CONFERENCE ON INFORMATION DISPLAY

## Achieving Incredible Immersion

/

#### Seamless Large Screens with Extreme-Narrow Bezel

The borderless design, with its 0.9 mm\* even bezel and 1.8 mm\* BtB (Bezel to Bezel), verified by Nemko, minimizes bezel interference and delivers immersive and seamless content on assembled video wall screens.

#### Image Gap Reduction

The 55VH7E-H includes an image improvement algorithm that can reduce image gaps among tiled displays when playing back videos. Objects located on the bezel boundaries are adjusted for a seamless viewing experience.





\* The 0.9 mm even panel bezel and 1.8 mm BtB size (borderless type, no metal bezel) have been verified by Nemko, a global institution that tests and certifies electrical equipment.

\* The "Conventional" refers to displays which do not include an image improvement algorithm.

# Vivid and Dynamic Picture Quality

### Higher Viewing Angle

/

Large screens are usually positioned higher than human-eye level, making uniform picture quality essential for video walls. The viewing angle of the 55VH7E-H is high enough to display vivid colors throughout the screen with no distortion.

### Clear View with Anti-Glare Coating

Viewers can easily become frustrated by unnecessary reflections when watching a screen under brightly lit conditions. The 55VH7E-H has resolved this problem by increasing the haze value up to 44%, enhancing content visibility and text readability.





\* Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment.

# Powerful Smart Signage Platform

### High Performance and Great Scalability

/

Thanks to its built-in SoC and webOS smart signage platform, the 55VH7E-H can execute several tasks at once while providing smooth content playback without the need for a media player. As webOS supports HTML5 as a webbased platform and offers SDK<sup>(Soft Development Kit)</sup>, it is even easier for SIs to build and optimize their web apps.



#### Flexible Content Creation

Four different videos can be played simultaneously via web apps, and various animation effects, such as scaling or rotating, are added to content using CSS<sup>(Cascading Style Sheets)</sup> transition effects. Real-time streaming\* is also available, providing the flexibility to organize and diversify content free from capacity limits.




\* Supported protocols: RTSP, RTP, HLS, UDP Multicast

# User-Friendly Smart Signage UX

#### Intuitive Menu Structure


/

The menu structure has been optimized for commercial use. It simplifies approach flows and groups similar functions together, adopting a more intuitive GUI for ease of use. This way, users can avoid having to do trial-and-error when exploring desired functions and managing displays.

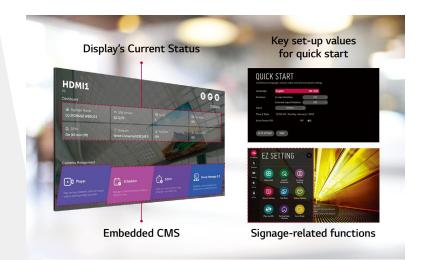

#### Dedicated GUI for Portrait Orientation

The conventional GUI<sup>(Graphic User Interface)</sup> was designed based on landscape-oriented consumer TV usage, so OSD<sup>(On Screen Display)</sup> wasn't well-suited for screens in portrait mode. The OSD of the 55VH7E-H, however, consists of a long range menu with bigger font sizes and a 9:16 ratio, creating a comfortable and efficient business environment.

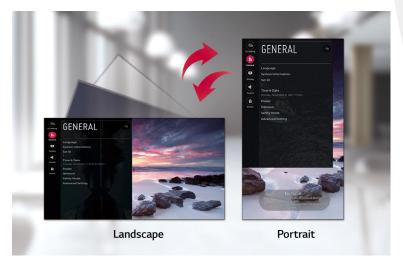

# **User Convenience**



#### Easy Color Adjustment

Depending on the content, the color temperature of the display can be easily adjusted in increments of 100K using a remote control.



### Simple White Balance Adjustment

In conventional video walls, white balance was adjustable only in "full-white" mode, but the 55VH7E-H allows you to modify each value of grey scale to achieve more detailed and precise white balance adjustment.



## **User Convenience**

/

#### LAN Daisy Chain Management

A LAN daisy chain allows you to execute commands to control and monitor video walls and even update their firmwares at once.

### /

#### **Real-Time Care Service**

The maintenance gets easier and faster with an optional service Signage365Care\*, a cloud service solution provided by LG service. It remotely manages status of displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of a client's business.






\* The availability of "Signage365Care" service can differ by region, so please contact the LG sales representative in your region for further details.

### Dimension (Unit: mm)

55"

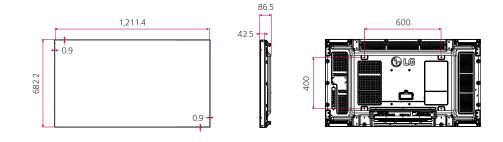

PANEL	Screen Size		55"
	Panel Technology		IPS
	Native Resolution		1,920 × 1,080 (FHD)
	Brightness (Typ.)		700 nit
	Contrast Ratio		1.200 : 1
	Dynamic CR <sup>1)</sup>		500,000 : 1
	Color Gamut		NTSC 72 %
	Viewing Angle (H × V)		178 × 178
	Color Depth		1.06 Bilion Colors (10 bit)
	Response Time		8 ms (G to G)
	Surface Treatment		Haze 44 %
	Operation Hours (Hours / Day)		24 / 7
	Portrait / Landscape		Yes / Yes
CONNECTIVITY	Input		HDMI (2), DP, DVI-D, Audio, USB 2.0 Type A
	Output		DP. Audio
	External Control		RS232C In / Out, RJ45 (LAN) In / Out, IR In
MECHANICAL SPECIFICATION	Bezel Color		Black
	Bezel Width		0.9 mm (Even Bezel)
	Monitor Dimension (W × H × D)		1,211.4 × 682.2 × 86.5 mm
	Weight (Head)		18.6 kg
	Handle		Yes
	VESA <sup>™</sup> Standard Mount Interface		600 × 400 mm
KEY FEATURE	EATURE		<ul> <li>web0S 4.0, 'Embedded CMS (Local Contents Scheduling, Group Manager),</li> <li>USB Plug &amp; Play, Fail Over, Background Image (Booting Logo Image, No Signal Image;</li> <li>Sync Mode (RS-232C Sync, Local Network Sync), Video Tag (2), Play via URL,</li> <li>Rotation (Screen Rotation, External Input Rotation), Gapless Playback,</li> <li>Tile Mode Setting (Max. 15 × 15), Setting Data Cloning, SNMP JSM Method,</li> <li>Auto Set ID, Status Mailing, Control Manager, Crestron Connected<sup>®20</sup>,</li> <li>Smart Energy Saving, PM Mode, Wake on LAN, HDMI-CEC<sup>3</sup>, SI Server Setting,</li> <li>webRTC, Prodidom, W/B Setting by Grey Scale, Scan Inversion</li> </ul>
ENVIRONMENT CONDITIONS	Operation Temperature		0 °C to 40 °C
	Operation Humidity		10 % to 80 %
POWER	Power Supply		AC 100 - 240 V ~, 50 / 60 Hz
	Power Type		Built-In Power
		Typ. / Max.	220 W / 260 W
	Power Consumption	BTU (British Thermal Unit)	751 BTU / Hr (Typ.), 887 BTU / Hr (Max.)
CERTIFICATION	Safety		CB / NRTL
	EMC		FCC Class "A" / CE / KC
	ErP		Yes (EU Only)
MEDIA PLAYER Compatibility	OPS Type Compatible		Yes (Piggyback)
Software Compatibility			SuperSign CMS, SuperSign Control / Control+, SuperSign WB, SuperSign Media Editor, Signage365Care <sup>4)</sup>
ACCESSORIES	Basic		Remote Controller, Power Cord, RS232C Cable, LAN Cable, DP Cable, IR Receiver, Guide Bracket, Screws, Manual
	Optional		Wall Mount (Landscape : WM-L640V, Portrait : WM-P640V), OPS Kit (KT-OPSF)

55VH7E-H

<sup>1)</sup>The luminosity ratio of Full Black / Full White color on video input condition.

<sup>2)</sup>Network based control

**Specifications** 


<sup>3)</sup>Compatibility may differ by equipment.

<sup>4)</sup>The availability can differ by region.

\* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.



### Connectivity

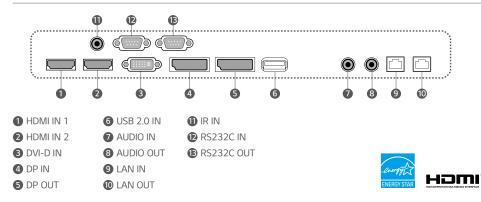

\* Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG sales team to verify before ordering.



twww.lg.com/b2b www.youtube.com/c/LGECommercialDisplay

- www.facebook.com/LGInformationDisplay
- in www.linkedin.com/company/lginformationdisplay

LG may make changes to specifications and product descriptions without notice. Copyright © 2020 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.